

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



## MEINHART KABEL ÖSTERREICH GmbH

WESTBAHNSTRASSE 6

A-4490 ST. FLORIAN / AUSTRIA

Tel. +43 7224 690 - 0

E-MAIL [INFO@MEINHART.AT](mailto:INFO@MEINHART.AT)

Web [WWW.MEINHART.AT](http://WWW.MEINHART.AT)

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



## TABLE OF CONTENT

### **1. PACKING**

#### 1.1. PALLETS

##### 1.1.1. CONDITION OF THE PALLETS

##### 1.1.2. LOADING THE PALLETS

##### 1.1.3. PACKING OF PALLETS FOR TRANSPORT

##### 1.1.4. MARKING OF PACKED PALLETS

#### 1.2. COILS

##### 1.2.1. MARKING OF COILS

##### 1.2.2. COILS ON PALLETS

#### 1.3. DRUMS

##### 1.3.1. PLYWOOD DRUMS

##### 1.3.2. WOODEN DRUMS

##### 1.3.3. MARKING OF DRUMS

##### 1.3.4. DRUMS ON PALLETS

#### 1.4. TOLERANCES

### **2. TRANSPORT**

#### 2.1. DELIVERY

#### 2.2. NOTIFICATION OF A DELIVERY

### **3. DOCUMENTS**

#### 3.1. PURCHASE ORDER

#### 3.2. ORDER CONFIRMATION

#### 3.3. DELIVERY NOTE / PACKING LIST

#### 3.4. TEST REPORTS

#### 3.5. INVOICE

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



## INTRODUCTION

These regulations apply to the delivery of goods to MEINHART KABEL Österreich GmbH in A-4490 St. Florian/AUSTRIA or on their behalf to the specified delivery address.

These regulations essentially describe the requirements for packing, transport, labeling and documents.

The General Terms and Conditions of Purchase of MEINHART Kabel Österreich GmbH also form the basis for every ordering process, provided no other contractual agreements have been made with the contractual partner ([www.meinhart.at/service/download](http://www.meinhart.at/service/download)).

We would like to point out that this regulations cover the minimum requirements only and do not claim to completeness.

## 1. PACKING

The quality of packing must be done in a way that:

- a. goods are protected from damages during transport
- b. packaging is prepared to the weight of the goods
- c. unloading with a forklift is possible without risk

### 1.1. PALLETS

Cables and wires on pallets will be stored in rack systems.

Fast moving items are sometimes stored under the roof with up to 4 pallets stacked on top of each other.

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS




## 1.1.1. CONDITION OF PALLETS

For transport on pallets, EURO pallets must be used in accordance with below mentioned dimensions. The use of other pallets is permitted as long as dimensions listed as well as stability of the pallets for shelf storage (maximum 1000 kg) of the delivered goods is guaranteed.

Dimensions of pallets:


- width: **80 cm**
- length: **120 cm**
- height: **14,4 cm**
- load capacity: **at least 1000 kg**

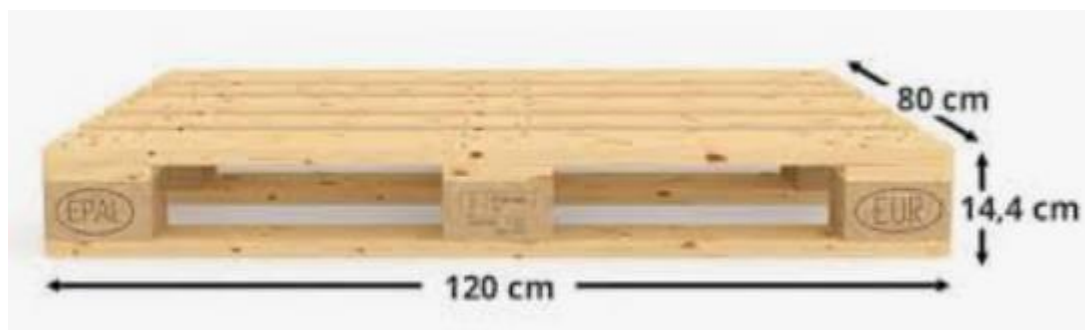

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

The goods may not overtop more than 50mm in length and 50mm in width of the pallet:

max. 2,5 cm

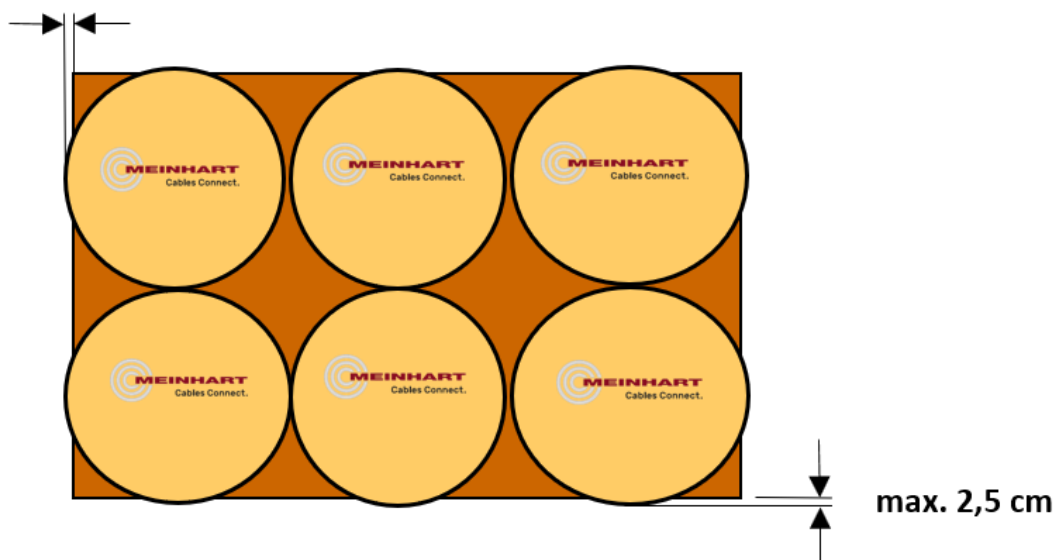

Maximum height of a loaded pallet including pallet: **112 cm !**

Remark:

The maximum total weight applies to both EURO pallets and non-returnable pallets.  
The load capacity of the pallets must be at least 1000 kg.



pallet is stable




pallet is too weak or goods too heavy

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

## 1.1.2. LOADING THE PALLETS

The goods (coils, boxes, drums etc.) should be loaded in such a way that the surface of the pallet is covered as much as possible and slipping during transport is not possible. Coils and drums must be fixed on the pallet in such a way that prescribed dimensions in item 1.1.1. do not exceed.

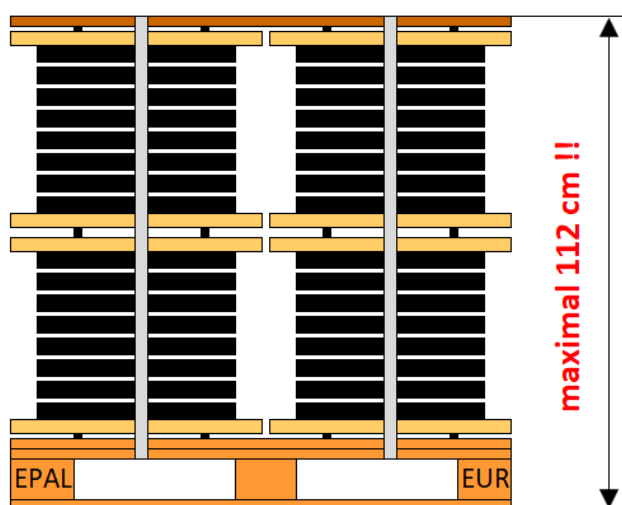

The surface of the loaded pallets must be flat to make storage as described in item 1.1. possible. This applies to full pallets only !

Different cables types, cross sections or packing units may never be packed together on one pallet.

- a. only one item per pallet
- b. only one packing unit per pallet.  
Example: coil 50m and coil 100m may not be packed together on one pallet

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



- c. the pallet quantity and packing unit for each single product must be coordinated with our purchase department in order to adjust the order quantity to full pallet quantities. Appropriate demand provided.

The specified pallet quantity must be the same for each delivery (see item 1.1.). This also applies to the drum sizes.

Example:

500m J-Y(ST)Y 2x2x0,8 delivery always in the same drum size and quantity per pallet.

- d. Exceptions:

Remaining length of different products can be packed together on one pallet. Each remaining length must be marked in color.

## 1.1.3. PACKING OF PALLETS FOR TRANSPORT

Each packed pallet must be protected with stretch foil to prevent slipping during transport.

It is important that the stretch foil is also wrapped around the pallet frame in order to create a compact and stable packing unit.

The stretch foil must not stick to the foil of coil and drums.

Only **transparent** stretch foils are accepted.

This applies to coils as well as to plywood drums, boxes or spools.

Multiple pallets **may not** be wrapped together !

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS





# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS



## 1.1.4. MARKING OF PACKED PALLET

Both narrow sides of the pallet must be marked with a label.

The label can be fixed on the outside or inside of the stretch foil.



Below informations must be listed on the label at least:

- manufacturer
- recipient ( usually the buyer )
- GTIN (formerly EAN number)

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---

- name of product
- cross section
- color
- total quantity in meter
- packing unit (coil, drum, box etc.)
- number of packing units
- pallet number
- CPR – marking for those products only which are under the CPR regulation (Construction Products Regulation) and declared as such in the purchase order including
  - name of the manufacturer
  - CPR – classification ( Eca, B2ca etc...)
  - DoP number

## 1.2. COILS

Coils may only be delivered wrapped in foil or carton box.

The core diameter must be adapted to the bending radius of the cable/wire.

Winding must be done „layer by layer“.

### 1.2.1. MARKING OF COILS

Each single coil must be marked with a label. The label must be placed under the foil or on the foil. Below informations must be listed on the label at least:

- name of product
- cross section
- color (RAL color code if specified on the purchase order)
- GTIN (formerly EAN number)
- quantity in meter
- standard (VDE, HAR, IEC)
- CE – marking for those products that are under EU directive 2006/95/EG
- weight

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---

- CPR – marking for those products only which are under the CPR regulation (Construction Products Regulation) and declared as such in the purchase order including
  - name of the manufacturer
  - CPR – classification ( Eca, B2ca etc...)
  - DoP number

## 1.2.2. COILS ON PALLETS

It is recommended to place a layer of cardboard on the pallet that covers the total dimension of the pallet (80 x 120 cm).

The coils should be stacked close together that pallet is as stable as possible.

Below dimensions may not be exceeded:

- height including pallet: **112 cm**
- width: **80 cm**
- length: **120 cm**
- total weight: **maximum 1000 kg**





The coils/boxes are secured on the pallet using straps, stretch foils or shrink foils. Stability of pallets must also be guaranteed in case of unforeseen situations during transport (e.g. emergency break of the truck).

### **1.3. DRUMS**

We differentiate between PLYWOOD DRUMS and WOODEN DRUMS.

Cables on plastic drums, iron drums or KTG drums may only be delivered with prior written approval from our purchase department.

Cable drums are stored on pallets (plywood drums) in the high rack warehouse as well as outdoor (wooden drums).

Quality, size, stability and load capacity of the drums must be adapted to the weight as well as to the allowed bending radius of the cables/wires.

#### **1.3.1. PLYWOOD DRUMS**

Plywood drums may only be delivered horizontal (lying on the flange) on pallets and flange diameter may not exceed 800 mm.


# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS



Plywood drums must have a core hole of at least 56 mm diameter. Other dimensions as listed below:

PLYWOOD drum- size	flange diameter	core diameter	hole diameter	total width	wrappig width	drum weight
	D 1	D 2	D 3	L 1	L 2	ca.
	mm	mm	mm	mm	mm	kg
041	400	150	56	420	404	3
045	450	150	56	420	404	3,5
051	500	150	56	420	404	4
061	600	200	56	420	390	7
071	700	310	80	420	380	11
081	800	310	80	420	380	15


Winding of the drums must be done in a way that a safety distance of at least 30 mm is ensured between the outer layer of the cable and the edge of the drum flange.

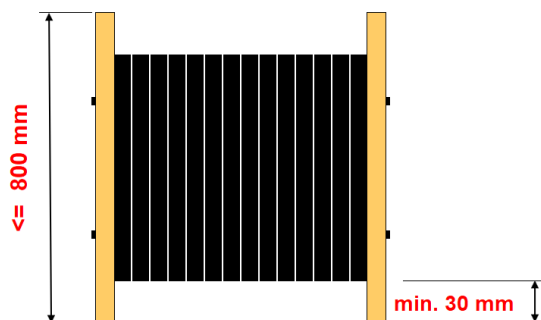

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---

Stability of the flange must be suitable for transport as below:

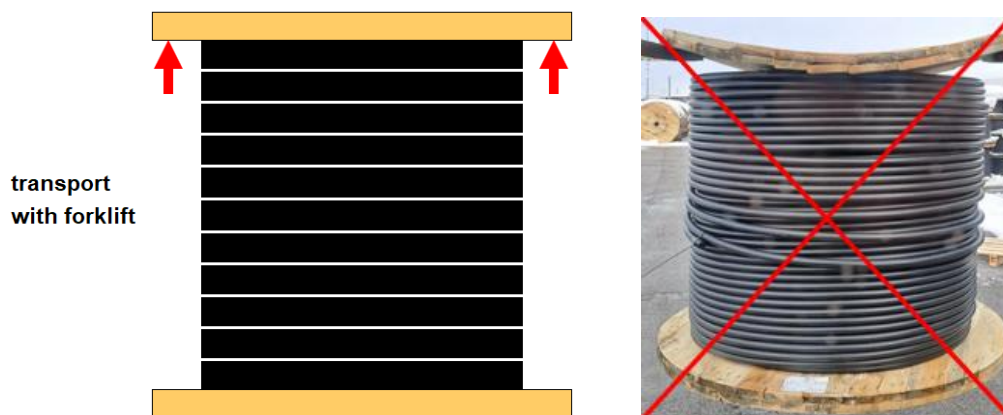


## 1.3.2. WOODEN DRUMS

- a. drums must be weather resistant and load capacity may not be impacted by long term storage outdoor.
- b. damaged flanges or brittle wood will not be accepted.
- c. load capacity of the drum must be in accordance to the weight of a full drum.
- d. wooden drums must be in accordance with the IPPC standard ISPM no. 15
- e. to avoid any mold on drums, only dry wood should be used.


## REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---


- f. Winding of the drums must be carried out in accordance with the VDE 0298 standard in a way that a safety distance of  $1,5 \times D$  to  $2 \times D$  ( $D$  = outer diameter of the cable) but at least 80 mm is ensured between the outer layer of the cable and the edge of the drum flange.

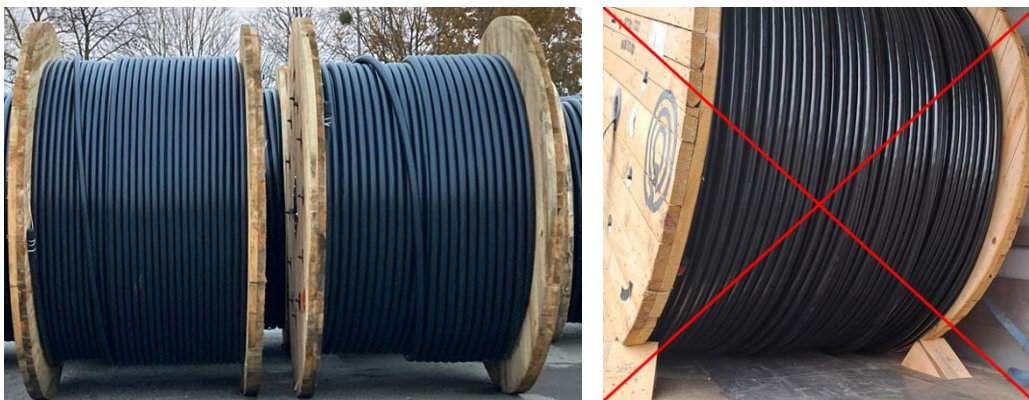


- g. Winding of drums must be done „layer on layer“ and may not be spooled too loosely.

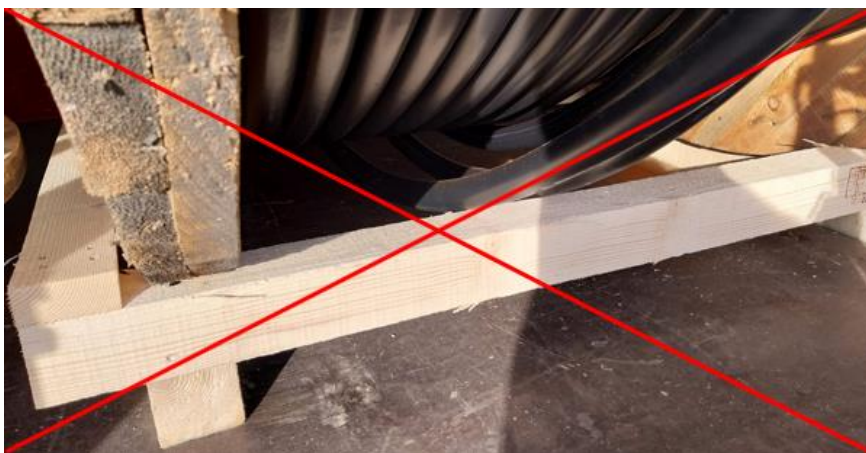

- h. drums with a flange diameter of up to 800 mm need to have a safety distance of at least 30 mm.

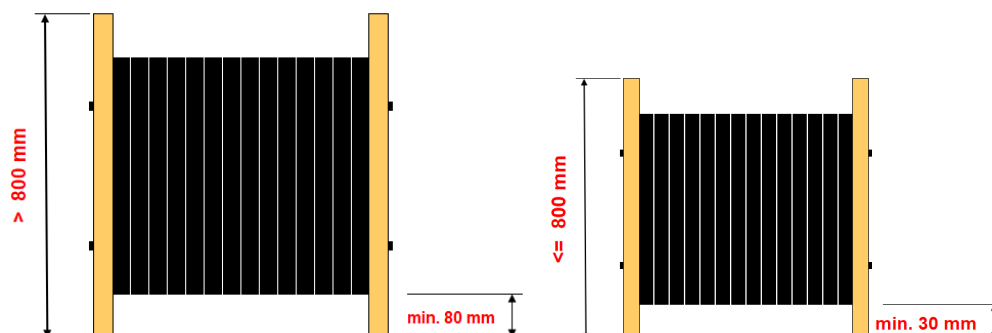

- i. stability of the flange (up to maximum 140 cm flange diameter) must be suitable for below transport according to sketch:

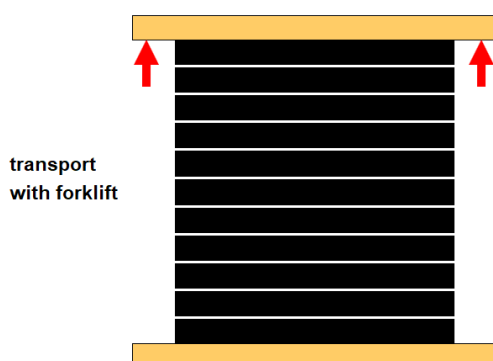

- j. cables where the outer jacket is not colored black must be protected with UV resistant foil including the drum flange.  
The foil may not be fixed to the cable with adhesive tape.  
To ensure that the foil remain on the drum even in case of strong wind, we recommend to fix the foil with adhesive tape on the outside with several times over an entire turn.
- k. only one cable length may be spooled per drum.  
Partial length must always be spooled on separate drums without any exception (risk of injury).
- l. Winding of drums must be done „layer on layer“.



# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---

- m. Full casing of wooden drums is only permitted upon request in accordance with our purchase order or after consulting with the purchase department.
- n. The cable ends must be sealed or welded watertight with PVC plug caps or shrink caps.
- o. Cable end must be fastened properly that end caps will not be damaged during transport.


**Nails are not permitted to fix the cable end !**

- p. Due to vibrations during transport, cable ends with a cable outer diameter > 25mm should be preferably fixed at the flange with a textile cord.



# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

- q. Drums must have a core hole of at least 80 mm diameter and should be according to below drum dimensions

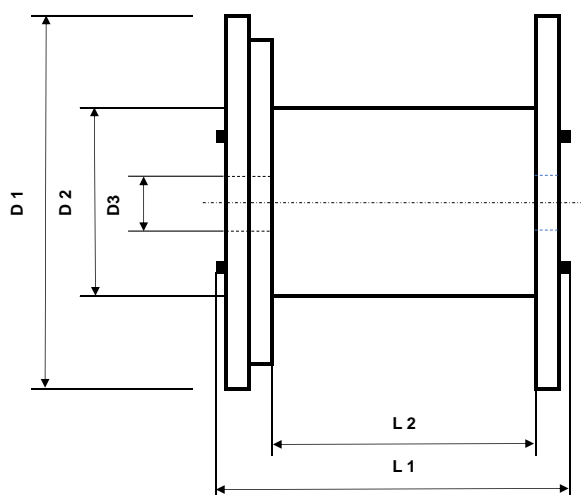

WOODEN drum- size	flange diameter	core diameter	hole diameter	total width	wrappig width	drum weight
	D 1	D 2	D 3	L 1	L 2	ca.
	mm	mm	mm	mm	mm	kg
061	600	280	80	520	400	13
071	710	355	80	520	400	25
081	800	400	80	520	400	31
091	900	450	80	690	560	47
101	1000	500	80	710	560	71
121	1250	630	80	890	670	144
141	1400	710	80	890	670	175
161	1600	800	80	1100	850	280
181	1800	1000	100	1100	840	380
201	2000	1250	100	1350	1045	550
221	2240	1400	100	1450	1140	710
250	2500	1400	125	1450	1140	875
251	2500	1600	125	1450	1130	900
281	2800	1800	140	1635	1280	1175

- Total weight of spooled WOODEN DRUM: **max. 9000 kg**
- Drum size (flange diameter): **max. 280 cm**

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



## 1.3.3. MARKING OF DRUMS

A weather proof label must be fixed at the outside and inside of the drum flange.

Below informations must be listed on the label at least:

- name of product
- cross section
- color (RAL color code if specified on the purchase order)
- GTIN (formerly EAN number)
- quantity in meter
- standard (VDE, HAR, IEC)
- CE – marking for those products that are under EU directive 2006/95/EG
- weight (gross weight and net weight)
- drum number – must be the same drum number as listed on the delivery note
- CPR – marking for those products only which are under the CPR regulation (Construction Products Regulation) and declared as such in the purchase order including
  - name of the manufacturer
  - CPR – classification ( Eca, B2ca etc...)
  - DoP number

## 1.3.4. DRUMS ON PALLETS

- a. Drums with a flange diameter of up to 800 mm which will be shipped on pallets must be fixed horizontal (laying on the flange) on the pallet.
- b. Loading the drums vertically (standing) on pallets is only permitted after coordination and written approval from our purchase department.
- c. The position of the drums on the pallet must be in a way that the drums are within the external dimensions (80 x 120cm) of the pallet and the cables will not be damaged by the drum flange.

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

- d. The drums must be secured on the pallet using straps, stretch foils or shrink foils. Stability of pallets must also be guaranteed in case of unforeseen situations during transport (e.g. emergency break of the truck).




- e. Below dimensions may not be exceeded:
- height including pallet: **112 cm**
  - width: **80 cm**
  - length: **120 cm**
  - total weight: **maximal 1000 kg**


# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

f. examples of pallet loadings:


- **PLYWOOD DRUM SIZE 041**

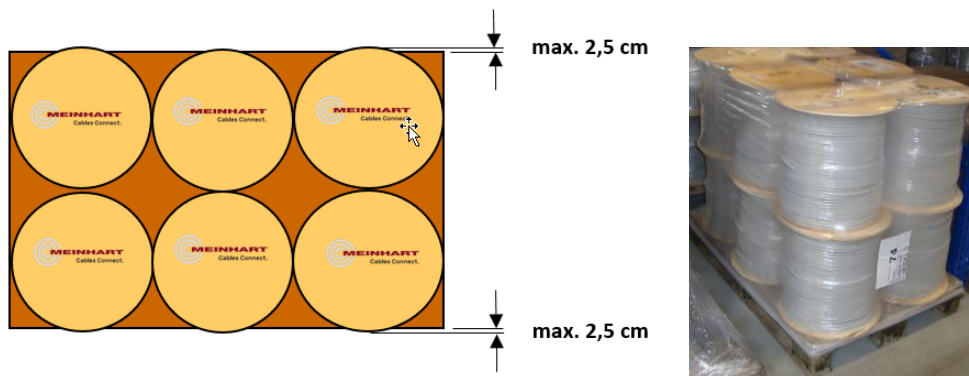


- **PLYWOOD DRUM SIZE 045**

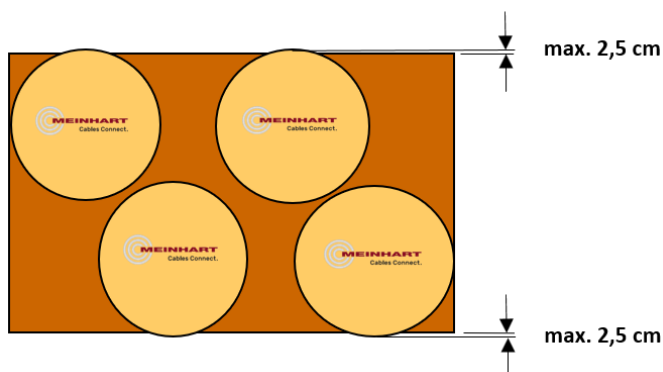

- **PLYWOOD DRUM SIZE 051**

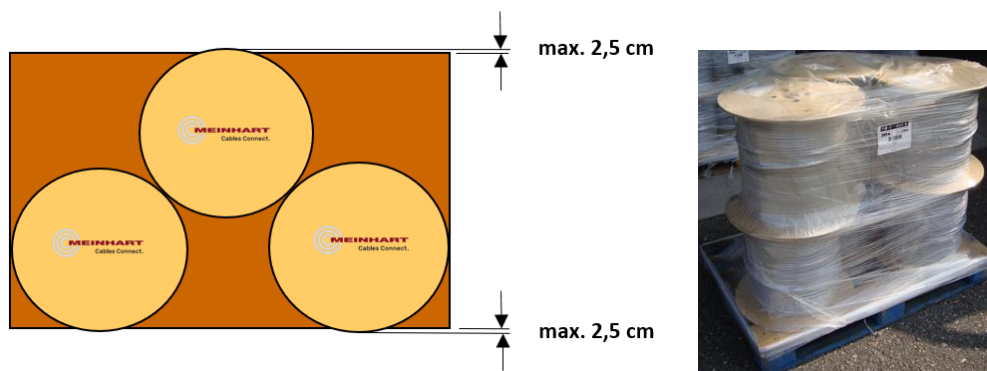

- PLYWOOD DRUM SIZE 061

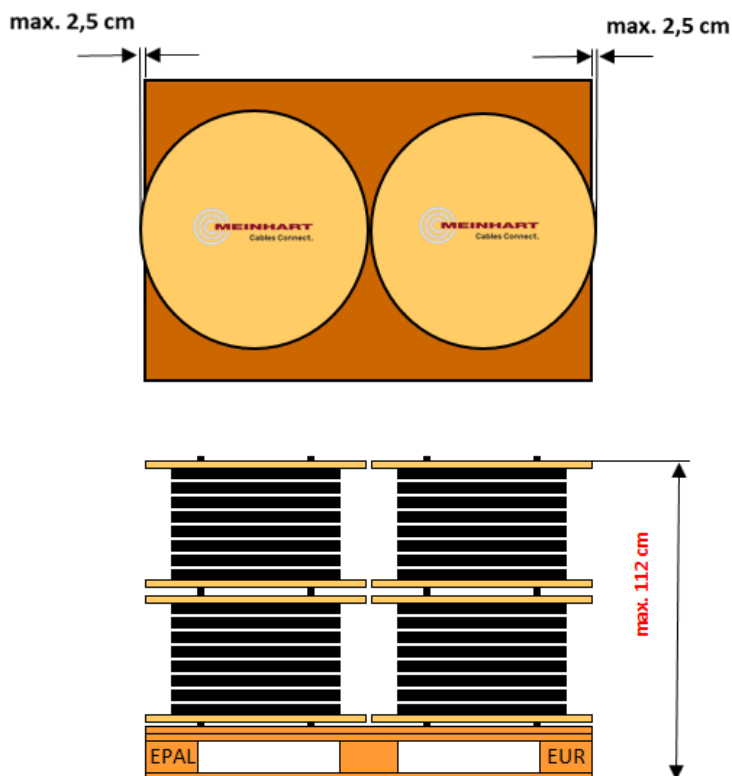

## 1.4. TOLERANCES

- Over-delivery as well as under-delivery of the stated quantity in the purchase order of up to +/- 5% for each position is permitted, if no partial length with agreed length tolerances were specified in the purchase order.
- Following length tolerances apply to the individual packing units:
  - Standard length of coils (e.g. 25, 50, 100m): +/- 0%
  - Standard length of drums (e.g. 300, 500, 1000m etc.): +/- 0%
  - Maximum length of drums: +/- 10%

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---

- c. Non standard length on drums effected by the production process may only be delivered after prior written approval from our purchase department.  
**No special length are accepted for coils.**
- d. Non standard length must be packed on extra pallets !
- e. Drums with non standard length must be marked color.



## 2. TRANSPORT


- a. Goods may only be delivered using tarpaulin trucks and tarpaulin trailers. Unloading must be possible from both sides of the truck and trailer and will be carried out by forklift.
- b. Containers are only permitted for the delivery of goods on pallets.  
Consider requirements described in item 1.1
- c. Wooden drums up to size 141 (140 cm flange diameter) can be loaded horizontally (laying on flange) on the truck.

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

- d. Wooden drums size 161 and up (160 cm flange diameter) must be loaded vertically (standing) with the flange parallel to the side wall.




wooden drums size  $\leq 141$

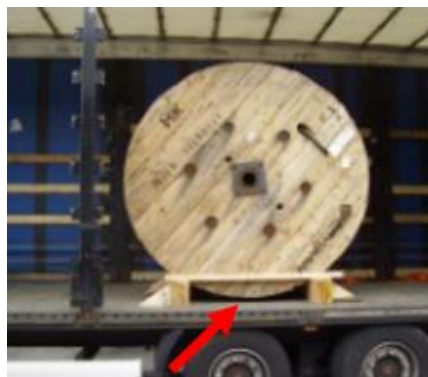

wooden drums size  $\geq 161$

Loading across the direction of travel is possible, but weight of drum may not exceed 7000 kg and a safety distance of  $\geq 20$  cm must be provided between the drum flanges for unloading by forklift:

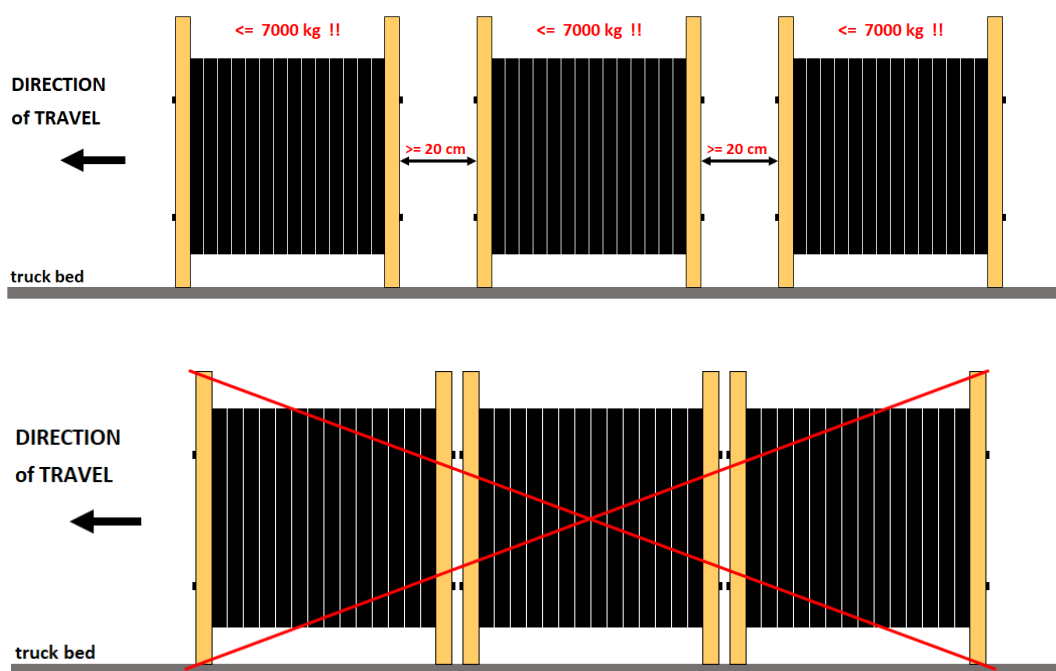

- e. It must be ensured that the tarpaulin guide rails on the truck can be opened. The truck driver must move the rails for safe unloading.



# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---

- f. Transportation lock:  
The goods must be secured using suitable components such as tension straps, wooden beams, wooden frames etc. that damages, slipping or overturn are excluded during transport, even in case of emergency break by the truck driver.
- g. Driving nails into the drums or pallets is not permitted.



- h. Plywood drums that are fixed with straps should be protected from damage by using edge protection.
- i. Pallets with coils may only be transported stacked if the lower pallet has a flat surface and is protected from damage by a cardboard or wooden plate.  
Both pallets must be appropriately secured against slipping or falling.  
Note: heavy pallet below, light pallet on top
- j. Stacked pallets may not be wrapped in foil together or even nailed together.
- k. Pallets with plywood drums may be transported stacked.
- l. Pallets with wooden drums may NOT be transported stacked.
- m. Wooden beams or cardboard between drums are not permitted.

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



## 2.1. DELIVERY

- a. Delivery to the central warehouse in A-4490 St.Florian/AUSTRIA is currently carried out without a time slot during opening times listed.  
Time slot booking for 2024 is in process and will be announced in time.
- b. We keep the right to refuse trucks if the packing regulations described in chapter 1 have not been taken into account.
- c. Products and packing units where multiples of a truck quantity has been ordered, „pure“ trucks must be delivered. That means, there is only one product in the same packing unit on the truck.

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



- d. Change of EURO pallets  
If EURO pallets are delivered, they will be replaced /exchanged with the same number of empty EURO pallets after unloading.  
If the truck driver / forwarder do not want to load empty EURO pallets, the „pallet account“ will be set to zero. Any exchange at a later date is no longer possible.

## 2.2. NOTIFICATION OF A DELIVERY

- a. As soon as the goods/truck leaves the factory delivery notification (aviso) must be sent by email to: [avisos@meinhart.at](mailto:avisos@meinhart.at)
- b. The notification includes a copy of the delivery note or packing list and must contain the exact content of the transport.
- c. If there are discrepancies between the delivery note/packing list and the content of the transport/truck, we keep the right to charge 150 EUR per transport/truck. Acceptance of the goods will be refused and unloading will only take place when all necessary documents have been correctly submitted and unloading is possible.
- d. Acceptance of goods is only possible at listed open hours:

Monday to Thursday: 07:00 a.m. - 12:00 p.m. and 12:30 p.m. - 15:00 p.m.

Friday: 07:00 a.m. - 13:00 p.m.

Adresse: Meinhart Kabel Österreich GmbH

Westbahnstraße 6

A-4490 St. Florian / AUSTRIA

Telefon: +43 7224 690 - 0

Email: [avisos@meinhart.at](mailto:avisos@meinhart.at)

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



- e. The truck must leave our premises immediately after unloading. Parking or waiting for the next transport order on our yard is strictly forbidden ! The use of parking areas outside the company premises for trucks that have already been unloaded is forbidden too !

## 3. DOCUMENTS

The delivery documents describe the entire delivery process and enable complete tracing of each individual packing unit from loading at the manufacturers plant to unloading at MEINHART warehouse or specified destination address including payment process of the delivered goods. Every delivery requires a prior written order from MEINHART KABEL Österreich GmbH.

### 3.1. PURCHASE ORDER

- a. Orders will be sent to the supplier exclusively by our purchase department by email.
- b. Our General Terms and Conditions of Purchase in the currently valid version ([www.meinhart.at/service/download](http://www.meinhart.at/service/download)) are the basis for every order.
- c. The delivered goods must be ROHS/REACH conform. If this cannot be confirmed by the manufacturer/supplier, a written approval from our purchase department is required before order acceptance and delivery.

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



## 3.2. ORDER CONFIRMATION

- a. The order confirmation has to be sent to the contact person listed in the order header within 5 working days after receiving the order.
- b. A copy of our order confirmed in writing by the supplier also counts as an order confirmation.
- c. Below informations must be listed on the order confirmation:
  - manufacturer/seller
  - number and date of order confirmation
  - contact person of the manufacturer, name and email
  - number and position of Meinhart order
  - Cable type including cross section, color, voltage range, standard,
  - Quantity, packing unit,
  - Base price and metal factor according to Meinhart order
  - Metal base (ALL IN or HOLLOW or 150 or 100 etc. )
  - Metal quotation and metal adjustment according to the order (LME, day of order, monthly average, etc.)
  - Payment terms as per order
  - Delivery date and delivery address (arrival date at the specified delivery address)
  - Incoterms as per order
  - Special agreement if stated on the order

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS



## Sample order confirmation

CUSTOMER: MEINHART KABEL ÖSTERREICH GmbH WESTBAHNSTRASSE 6 A-4490 St.Florian/AUSTRIA UID Nr. ATU 63684739					order confirmation No. 123456 date 4.3.2023							PRODUCER: CABLECOMPANY PRODUKTIONSSTRASSE 123 A-1234 ORT/AUSTRIA UID/VAT Nr. XX 00000000		
MEINHART order-number	Pos.	quantity	type, cross section, colour, voltage range, standard	standard	packing	packing unit	number of packing units	copper factor kg/km	aluminum-factor kg/km	copper-base EUR/100kg	aluminium-base EUR/100kg	base-price EUR/km	metal-notice	metal-adjustment
00001001	10	12.000 m	NYJ-J 3x1,5 RE schwarz	VDE	coil	50 m	240	43,2	0	0	0	999,00	e.g. LME	e.g. average month before shipment
00001001	20	24.000 m	J-Y(ST)Y 2x2x0,8 grau	VDE	coil	100 m	240	21	0	100	0	999,00	e.g. LME	e.g. average month before shipment
00003255	10	18.000 m	NYM-J 5x1,5 grau	VDE	drum	500 m	36	72	0	150	0	999,00	e.g. LME	e.g. average month before shipment
00003255	20	6.000 m	NAYY-O 1x240 RM schwarz	VDE	drum	1000 m	6	0	696	0	0	999,00	e.g. LME	e.g. average month before shipment
00004244	10	2.000 m	NA2XS(F)2Y 1x240rm/25 12/20kV	VDE	drum	2000 m	1	283	696	0	0	999,00	e.g. LME	e.g. average month before shipment

sales contact: Mr. Mustermann, max.mustermann@cablecompany.com  
 Delivery address: Meinhart Kabel Österreich GmbH, Westbahnstraße 6, A-4490 St.Florian, Austria  
 payment terms  
 Incoterms

### 3.3. DELIVERY NOTE / PACKING LIST

- a. Shipment documents must be transmitted by email.
- b. Below informations must be listed on the delivery note:
  - Name of manufacturer
  - Number of delivery note
  - date
  - Meinhart order number
  - quantity
  - Cable type
  - Cross section
  - color
  - number of packing units
  - packing units (coil, drum, box ...)
  - quantity per packing unit (100m, 500m, .....)
  - drum type (wood, plywood, PVC, iron)
  - drum size

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS



- drum number
- number of pallets and quantity per pallet
- meter INSIDE and meter OUTSIDE for all cables with meter marking on the outer sheath

## Sample delivery note

CUSTOMER: MEINHART KABEL ÖSTERREICH GmbH WESTBAHNSTRASSE 6 A-4490 St.Florian/AUSTRIA			delivery note no. 123456 date 4.3.2023 invoice no. 123456 truck no. 123456					PRODUCER: CABLECOMPANY PRODUKTIONSSTRASSE 123 A-1234 ORT/AUSTRIA			
MEINHART order-number	quantity	type, cross section, colour	quantity	packing unit	packing	drum type drum size	drum number	quantity per pallet	number of pallets	net weight	gross weight
00001001	12.000 m	NY-Y-J 3x1,5 RE schwarz	240	50 m	coil			3.000 m	4	3.000 kg	3.100 kg
00001001	24.000 m	J-Y(ST)Y 2x2x0,8 grau	240	100 m	coil			8.000 m	3	1.300 kg	1.375 kg
00003255	18.000 m	NYM-J 5x1,5 grau	36	500 m	drum	S 061		2.000 m	9	3.900 kg	4.350 kg
00003255	6.000 m	NAYY-O 1x240 RM schwarz	6	1000 m	drum	H 161	123456			6.300 kg	7.980 kg
00004244	2.000 m	NA2XS(F)2Y 1x240rm/25 12/20kV	1	2000 m	drum	H 241	987654			3.500 kg	4.350 kg

### 3.4. TEST REPORT

If requested on the order, please send the test report as a PDF file to the purchase department.

Name of the PDF file includes Meinhart order number and the number of the delivery note:

BEST00001234-LS123456789.pdf

BEST00001234: MEINHART order number

LS123456789: number of delivery note

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



## 3.5. INVOICE

a. Invoices to be sent by email to:

[buchhaltung@meinhart.at](mailto:buchhaltung@meinhart.at)

b. Separate invoices must be issued for each single truck and each single container. One invoice for several trucks/containers is not permitted.

c. Following informations must be listed on the invoice:

General informations:

- Recipient of the invoice, usually MEINHART KABEL Österreich GmbH including our VAT no. ATU63684739
- Issuer of invoice, usually the supplier including his address and VAT number
- Invoice number
- Date
- Delivery note number
- MEINHART order number
- Incoterms
- Bank details, IBAN, BIC, name of the bank
- Remark on the invoice, valid for suppliers within the European Union only:  
„Der Beleg enthält steuerfreie innergemeinschaftliche Lieferungen“
- Total amount before cash discount (sconto) in EUR
- Amount of cash discount (sconto) in EUR (optional)
- Total amount after reduction of cash discount (optional)
- Payment period in days – **starting after receiving the goods at agreed place**



# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS



Information per each single position on the invoice:

- Position number
- quantity
- packing unit (coil, drum, box ...)
- type of cable, cross section, core construction, color, voltage range
- copper factor (kg/km) and aluminum factor (kg/km)
- Metal base (EUR/100kg or EUR/Ton)
- Copper quotation and aluminum quotation (EUR/100kg or EUR/Ton)
- Agreed base price (EUR/km)
- Total value for each single position, metal included (EUR)

Sample invoice

<b>CUSTOMER:</b> MEINHART KABEL ÖSTERREICH GmbH WESTBAHNSTRASSE 6 A-4490 St.Florian/AUSTRIA UID Nr. ATU 63684739				<b>invoice no. 123456</b> <b>date 4.3.2023</b> <b>delivery note no. 123456</b>					<b>PRODUCER:</b> CABLECOMPANY PRODUKTIONSSTRASSE 123 A-1234 ORT/AUSTRIA UID/VAT Nr. XX 00000000			
pos.	MEINHART order-number	quantity	type, cross section, colour	packing	copper factor kg/km	aluminum-factor kg/km	copper-base EUR/100kg	aluminium-base EUR/100kg	copper-notice EUR/100kg	aluminium-notice EUR/100kg	base-price EUR/km	summary EUR
10	00001001	12.000 m	NY-Y-J 3x1,5 RE schwarz	coil	43,2	0	0	0	777,77	322,01	999,00	16.019,96
20	00001001	24.000 m	J-Y(ST)Y 2x2x0,8 grau	coil	21	0	100	0	777,77	322,01	999,00	27.391,96
30	00003255	18.000 m	NYM-J 5x1,5 grau	drum	72	0	150	0	801,75	311,87	999,00	26.428,68
40	00003255	6.000 m	NAYY-O 1x240 RM schwarz	drum	0	696	0	0	801,75	311,87	999,00	19.017,69
50	00004244	2.000 m	NA2XS(F)2Y 1x240rm/25 12/20kV	drum	283	696	0	0	790,34	333,08	999,00	11.107,80
									summary		99.966,09	
delivery: DAP A-4490 St.Florian/Austria									3% sconto		-2.998,98	
payment term: 30 days 3% Sconto									<b>summary net</b>		<b>96.967,11</b>	
bank account: IBAN AT00 0000 0000 0000 0001, BIC XXXXXXXXXXXX, name of the bank												

# REGULATIONS for PACKING, TRANSPORT and DOCUMENTS

---



Please confirm that you have read these regulations and that your deliveries are in accordance with the regulations.

---

name and address of producer

---

contact person

---

place, date

---

signature / stamp